

# CONDUCTION COOLED CAPACITORS

## FP-9-200 Conduction Cooled Capacitors For Induction Heating


### Highlights

- Conduction cooled
- Polypropylene dielectric
- Self-healing
- Operating frequency up to 650 KHz



### Specifications

Rated Voltage Vrms	Nominal Capacitance Mfd at 1Khz	Max. current Irms	Max. power Kvar	Frequency KHz	ESR mΩ	Dimensions mm			Terminal Style
						B	H	L	
700	0.18	350	200	350-550	1.5	30.2	50	75	AL
	0.24	400	200	280-530	1.2	30.2	50	75	AL
	0.33	350	200	190-300	1.0	30.2	50	75	AL
600	0.66	450	200	130-240	0.8	30.2	50	75	AL
500	1.2	500	200	110-170	0.6	30.2	50	75	AL
400	2.4	500	200	83	0.4	30.2	50	75	AL

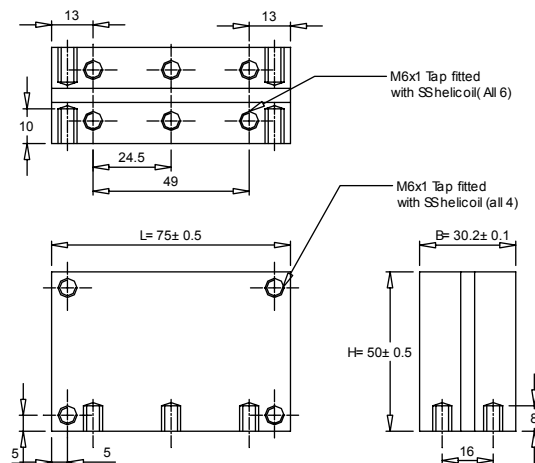


Terminal Style : AL

Dimensions in mm

# CONDUCTION COOLED CAPACITORS

## FP-9-200 Conduction Cooled Capacitors For Induction Heating

### Frequency Derating

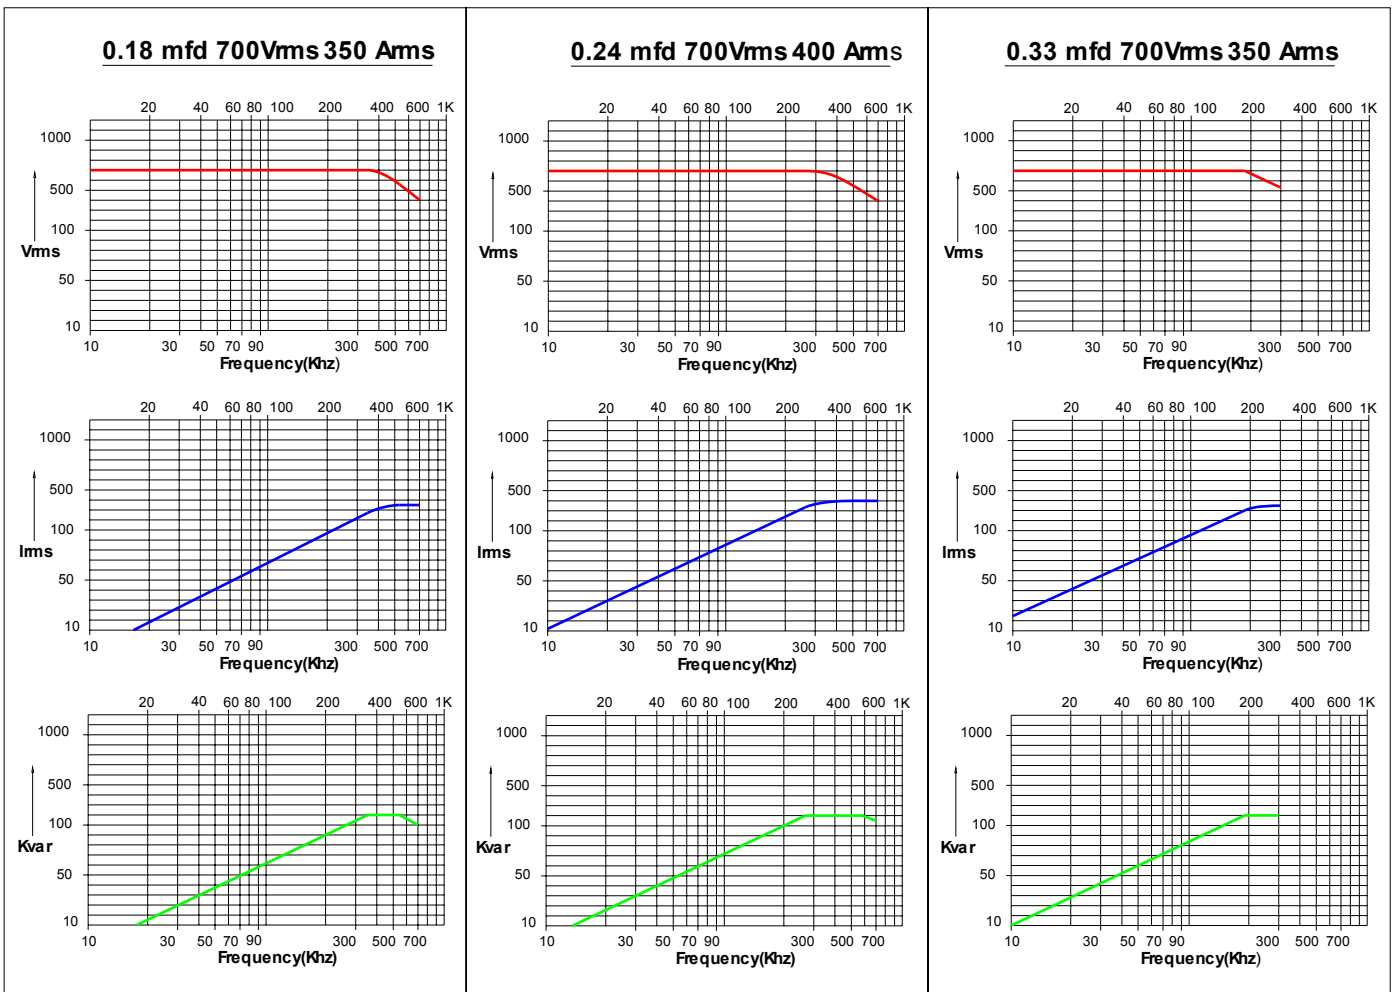

# CONDUCTION COOLED CAPACITORS

## FP-9-200 Conduction Cooled Capacitors For Induction Heating

### Frequency Derating

